


ANT58-2210MW

2x2 22dBi 5150-5850MHz

Directional Panel Antenna



Radiation Patterns

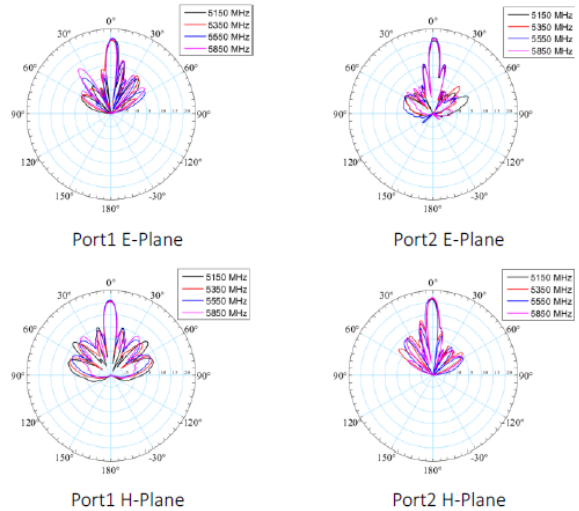

PRODUCT SPECIFICATIONS

Electrical

Frequency Range	5150-5850 MHz
Gain	22dBi +/-1dB
VSWR	<2.0
Polarization	Dual Linear; V&H
Impedance	50 ohms
3dB Beamwidth(H-Plane)	9°
3dB Beamwidth(E-Plane)	9°
Front to Back Ratio	>25dB
Isolation (Port to Port)	>25dB typical
Input Power, max.	<50W
Lighting Protection	DC Grounded

Physical and Environmental

Dimension (WxLxH)	380x380x18 mm
Weight	1.5kg
Connector	2x SMA/f
Radome / Color	ABS, UV Resistant / Light Gray
Mounting	Pole / Wall ; Adjustable
Operating Temperature	-40°C~65°C
IP Rating	IP67
Wind Load (Survival)	200km/h



Mounting