


# KWA-O6031-I MIMO 300Mbps Outdoor Bridge 4.9-6.1GHz

Formosa KWA-O6031-I Wireless 2x2 MIMO Bridge provides reliable and predictable Wireless Bridge Connection or Wi-Fi Coverage. With these wireless access points you can:

- Augment throughput for high-bandwidth wireless applications
- Protect your investment in wireless networking
- Increase network reliability for high bandwidth applications

Data rates of 300 Mbps  
Multiple input, multiple output technology for enhanced reliability  
5GHz radio module

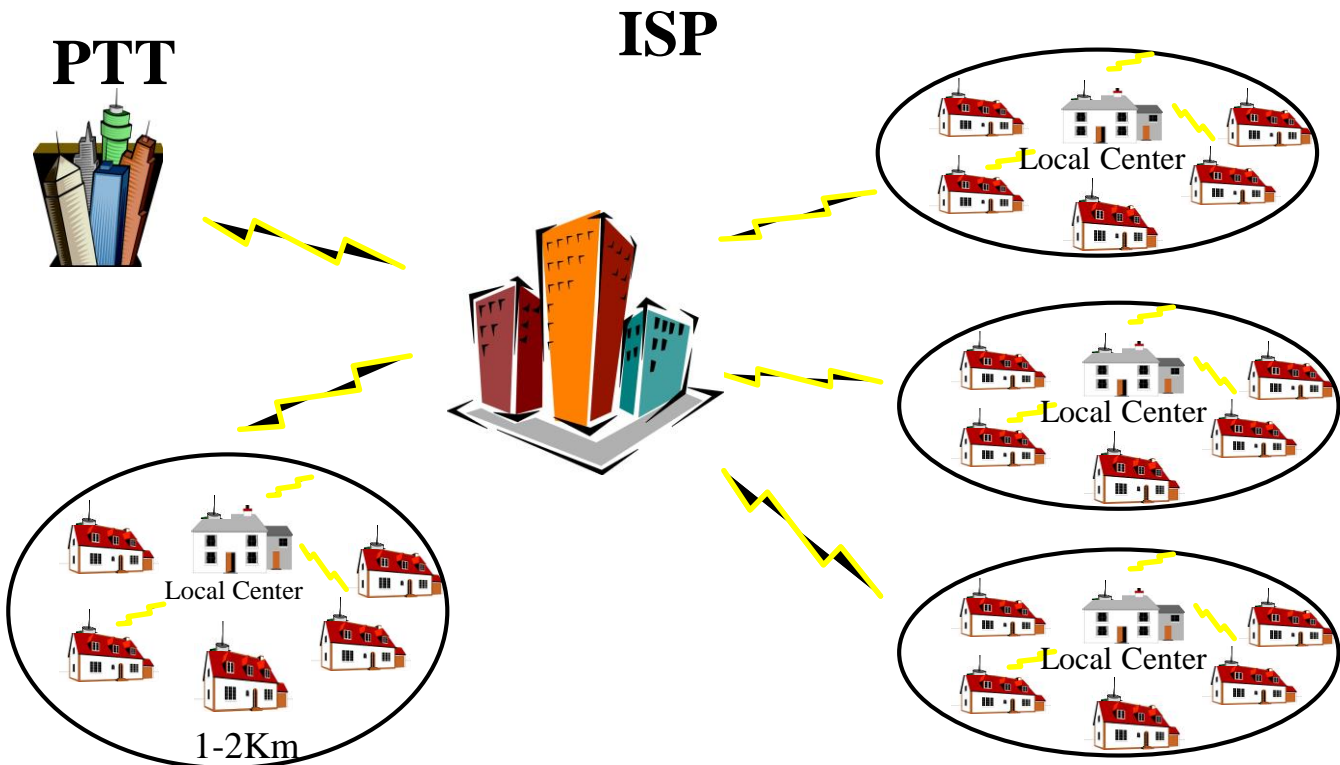


TOUCH AND CONNECT!™

WNet  
Green Network™

## WiVIEW 2, Managed Tool

No	Status	Model Name	IP Address	Location	Routing	Description
1	●	KWA-O1850-I	192.168.3.1		192.168.3.2	WIFDD
2	●	KWA-O1850-I	192.168.3.2		192.168.3.1	WIFDD
3	●	KWA-O1850-I	192.168.3.3		192.168.3.4	WIFDD
4	●	KWA-O1850-I	192.168.3.4		192.168.3.3	WIFDD
5	●	KWA-O8800-I	192.168.3.5		192.168.3.6	WITDM
6	●	KWA-O8800-I	192.168.3.6		192.168.3.5	WITDM
7	●	KWG-O6020-I	192.168.3.7		192.168.3.10	BGN_AP
8	●	KWA-O6020-I	192.168.3.8		192.168.3.9	Bridge
9	●	KWA-O6020-I	192.168.3.9		192.168.3.8	Bridge
10	●	KWA-O670R	192.168.3.10		192.168.3.7	BGN_Repeater

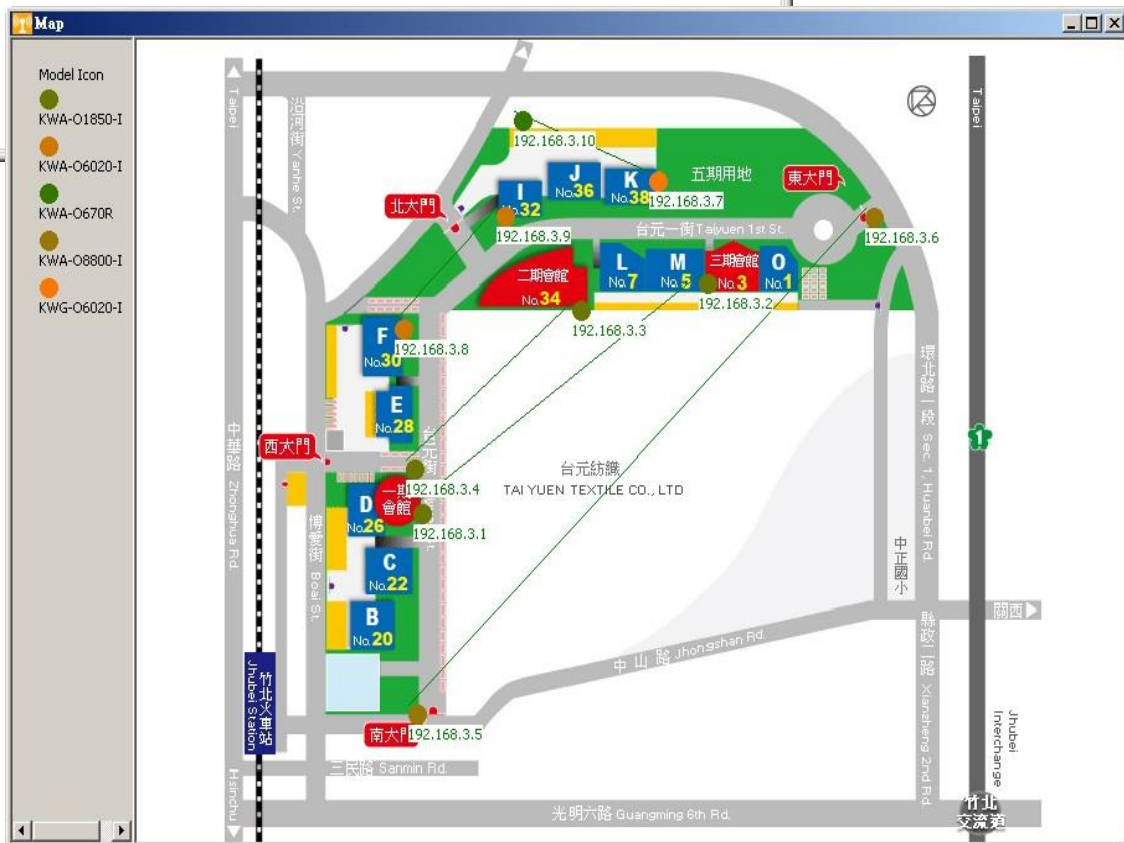

Bridge Location on the MAP

## Specification

Specification	
HARDWARE	
Memory	16MB Flash + 64MB SDRAM
LAN	10/100BaseT RJ-45 with Auto-MDIX
Enclosure	Metal Case, IP 67 Verified
Default Button	Yes
LED	Power / RSSI / LAN
Ground	Yes
Power Requirements	802.3af 48V PoE
RADIO	
Wireless	OFDM
Output Power	29dBm@6Mbps / 27dBm@54Mbps / 30dBm@HT20 / 27dBm@HT40
Sensitivity	-89dBm@6Mbps / -70dBm@54Mbps / -65dBm@HT20 / -62dBm@HT40
Antenna	2x2 20 dBi
Receiver Adjacent Channel Rejection (ACR)	> 20 dB
Receiver Alternate Channel Rejection (ALCR)	> 40 dB
FEATURE	
Operating Mode	AP, Bridge, CPE, Virtual AC
Channel Bandwidth	20 / 40 MHz
Data Bandwidth Control	Yes
Output Power Management	Yes (Full, Half, Quarter, Eighth, Min.)
Max. Client Setting	Yes
TDM Coordination	Yes
NAT	Yes
VLAN	Yes, Up to 8 VAP
IGMP Snooping	Yes
Channel Protection	Yes
Spanning Tree	Yes (802.1d)
RTS Threshold Setting	Yes (0-2,346)
Fragmentation Setting	Yes (256-2,346)
Beacon Interval Setting	Yes (20-1,000)
DTIM Interval Setting	Yes (1-255)

<b>SECURITY</b>	
MAC Control	Yes
WEP Encryption	64, 128, 152-bit
WPA / WPA2	Yes
Wireless Isolation	Yes
Hidden SSID	Yes
Firewall	Yes
VPN	VPN Pass-through (IPsec, L2TP, PPTP)
<b>MANAGEMENT</b>	
Managed AP Setting	Yes
Web Base Management	Yes
Windows Tool	WiVIEW 2
Console	Yes
SNMP	V1, V2C, V3
Support Time Server	Yes
Support Log Server	Yes
Ping Watchdog	Yes
Site Survey	Yes (Scan Tool)
<b>PHYSICAL</b>	
Operating Temperature	-20 ~ 80C
Operating Humidity	10 ~ 95% RH
Weight	3.0 Kg
Dimension	320 x 320 x 95 mm

